

# PORTABLE MULTI GAS MONITOR

## MODEL GX-8000



### ◆ Application

- Confined space
- Refineries/Petrochemical/Chemical plants
- Oil tanker/Gas carrier/Bulk carrier
- Chemical tanker
- Water/Wastewater treatment
- Fire services
- Telecommunication services
- Power plant
- Gas plant/Gas supplier services
- Utilities
- Coating field
- Fuel cell facilities

### ◆ Features

- Real-time detection of max. 5 ranges Combustibles 100vol%/100%LEL, O<sub>2</sub>, H<sub>2</sub>S & CO
- Large simultaneous display with auto back lighting
- Strong sample drawing capability
- Loud alarm buzzer with 95dB
- 3 bright LED alarm windows
- ATEX Exia II CT4 approved
- Water and dust resistant IP67
- Lithium-ion rechargeable battery
- Compact and light weight
- Ergonomic design with waist strap for hands free operation
- Datalogging standard



# COMPONENT DESIGNATIONS

The GX-8000 sets the new industry standard for rugged, reliable portable gas detection. It's tough, water proof design utilized features based on years of gas detection design experience, to assure that the instrument will operate properly to protect workers and property in all kinds of harsh gas detection applications.

## LCD display

Large display shows all gases simultaneously

## Audible alarm

Loud distinct tone, 95dB with two openings

## Alarm lamps

Three bright LED indications

## Switches

Easy operation and control with four switches

## IrDA port

Combustible  
(100vol%)

Combustible  
(100%LEL)

## Waist strap fitting

Optional


Sample gas inlet

Sample gas outlet


Charging port




## Display screen example

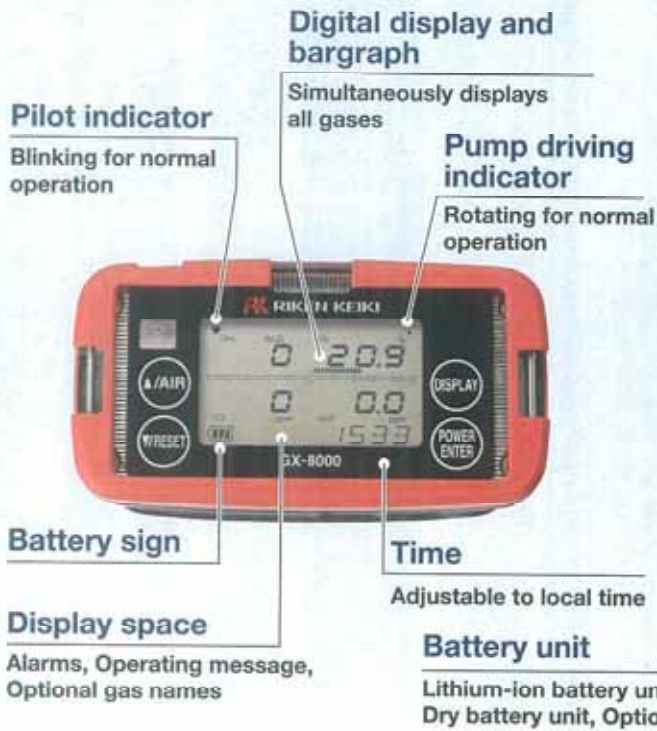

## Side view

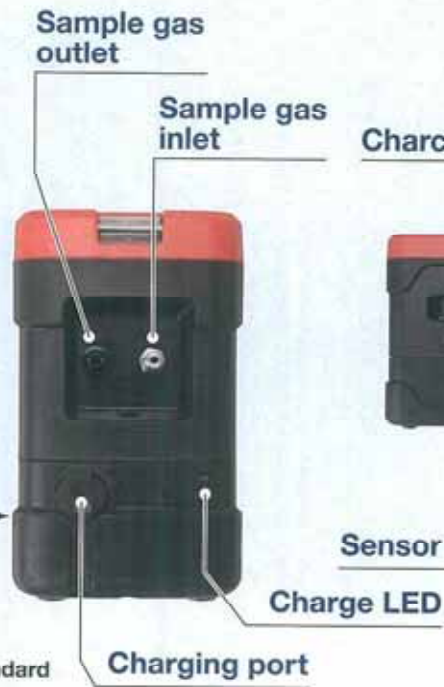

## Rear view

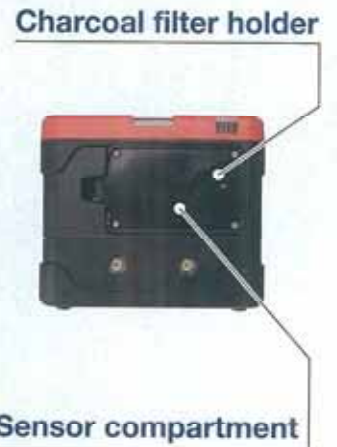

## Direct readout combustibles

Standard		LEL	Detection range
iso-Butane	i-C <sub>4</sub> H <sub>10</sub>	1.8vol%	0-100%LEL/0-100vol%
Methane	CH <sub>4</sub>	5.0vol%	0-100%LEL/0-100vol%
Hydrogen	H <sub>2</sub>	4.0vol%	0-100%LEL/0-100vol%

Option (factory setting)		LEL	Detection range
Acetylene	C <sub>2</sub> H <sub>2</sub>	1.5vol%	0-100%LEL
Methylalcohol	CH <sub>3</sub> OH	5.5vol%	0-100%LEL
MEK	CH <sub>3</sub> COC <sub>2</sub> H <sub>5</sub>	1.8vol%	0-100%LEL
n-Hexane	CH <sub>3</sub> (CH <sub>2</sub> ) <sub>4</sub> CH <sub>3</sub>	1.2vol%	0-100%LEL
Toluene	C <sub>6</sub> H <sub>5</sub> CH <sub>3</sub>	1.2vol%	0-100%LEL

LEL values according to the directive by TIIS edition RIIS-TR-79-1 in 1979.  
TIIS : Technology Institution of Industrial Safety

## Data logger download via IrDA communication



## GX-8000 gas combinations available

		Combustibles 0-100vol%	Combustibles 0-100%LEL	O <sub>2</sub> 0-40.0%	H <sub>2</sub> S 0-100.0ppm	CO 0-500ppm
Four gases/ Five ranges	Type-A	●	●	●	●	●
Four gases	Type-B		●	●	●	●
Three gases	Type-C		●	●	●	
	Type-D		●	●		●
Two gases/ Three ranges	Type-E	●	●	●		
Two gases	Type-F		●	●		

Please specify gas combinations when ordering



# Specifications

# MODEL GX-8000

Target gas	Combustibles (CH <sub>4</sub> , i-C <sub>4</sub> H <sub>10</sub> , H <sub>2</sub> , others)		Oxygen (O <sub>2</sub> )	Hydrogen sulfide (H <sub>2</sub> S)	Carbon monoxide (CO)
Detection principle	Thermal conductivity	Catalytic combustion	Galvanic cell	Electrochemical	Electrochemical
Detection range (Increments)	0-100vol% (1vol%)	0-100%LEL (1%LEL)	0-40.0% (0.1%)	0-100.0ppm (0.5ppm)	0-500ppm (1ppm)
Gas alarm	N/A	1st : 10%LEL 2nd : 50%LEL	1st : 19.5% 2nd : 23.5%	1st : 10.0ppm 2nd : 30.0ppm TWA : 10.0ppm STEL : 15.0ppm	1st : 25ppm 2nd : 50ppm TWA : 25ppm STEL : 200ppm
Types of alarm	Gas alarm : Latching, 2 alarms Failure alarm : Flow failure, Sensor failure, Battery failure, Circuit failure, Calibration failure				
Display of alarm	LED : LED's flash Buzzer : Buzzer sounds alternating between a low and high pitch Visual indication : Indication value flashes. Alarm message displays and flashes.				
Alarm sound	More than 95dB (A) at 30cm				
Display	Digital LCD with auto backlight Digital display (7 segments) and digital bargraph (25 segments)				
Sampling method	Sample Draw, Minimum 0.75L/min				
Power source	Lithium-ion battery, Standard (3 hours for a full charge) AA Alkaline battery (3pcs), Option				
Continuous operation	Lithium-ion battery : more than 12 hours AA Alkaline battery : more than 6 hours				
Operating temp & humidity	-20~+50°C, -4~+122°F below 95%RH (Non-condensing)				
Dimensions & Weight	Approx. 154(W) × 81(H) × 127(D) mm, Approx. 1.1kg Approx. 6.1"(W) × 3.1"(H) × 4.9"(D), Approx. 2.4lb				
Ingress proof rating	Equivalent to IP67				
Explosion proof	Intrinsically safe Exia II CT4				
Approvals	IECEX, ATEX, TIIS MED, HK, CE mark, all approvals submitted and pending				
Additional features	Complying to IEC60079-29-1 Indication to show energizing (pilot indicator and pump driving indicator), Pump stop function, Bump test function, IrDA communication, Data logger, Password protection				

Specifications subject to change without notice

## Standard accessories

- AC powered charger  
(Input : AC100V~AC240V, 50/60Hz)  
(Output : DC12V, 1.25A)
- Gas sampling probe
- Gas sampling hose (Spiral 1m)
- Lithium-ion battery unit BUL-8000
- Neck/shoulder strap
- Instruction manual

## Optional accessories

- Dry battery unit BUD-8000
- Gas sampling hose 8m with float type sampling head
- Gas sampling hose 30m with plummet
- Filter tube
- Junction tube
- Diluter adapter (for bulk carrier application)
- Waist strap
- Sampling probe holder on the neck/shoulder strap
- Leather carrying case
- Storage box for marine use
- Carrying box
- Calibration gas set
- Flow control demand valve
- Datalogging software

## RIKEN KEIKI Co.,Ltd.

2-7-6 Azusawa, Itabashi-ku, Tokyo 174-8744, Japan

Phone : +81-3-3966-1113

Telefax : +81-3-3558-9110

E-mail : [intdept@rikenkeiki.co.jp](mailto:intdept@rikenkeiki.co.jp)

Web site : <http://www.rikenkeiki.co.jp>

★ Distributed by: